


Main Features:

1. Compact design for laptop users
2. Cherry MX switches inside
3. Arbitrary programming key-code and LED colors (Backlit only)
4. Build in 4 layers for programming
5. PBT DSA profile keycaps with Dye-Sublimated technology
6. Anodized CNC-machined aluminum case
7. Narrow bezel
8. Detachable Micro USB cable

Package Content:

1. Keyboard x 1
2. Micro USB Cable x 1
3. User manual x 1
4. Extra Mac & RGBY modifiers keycap
5. Keycap-puller x 1

Keyboard Layout (Default):

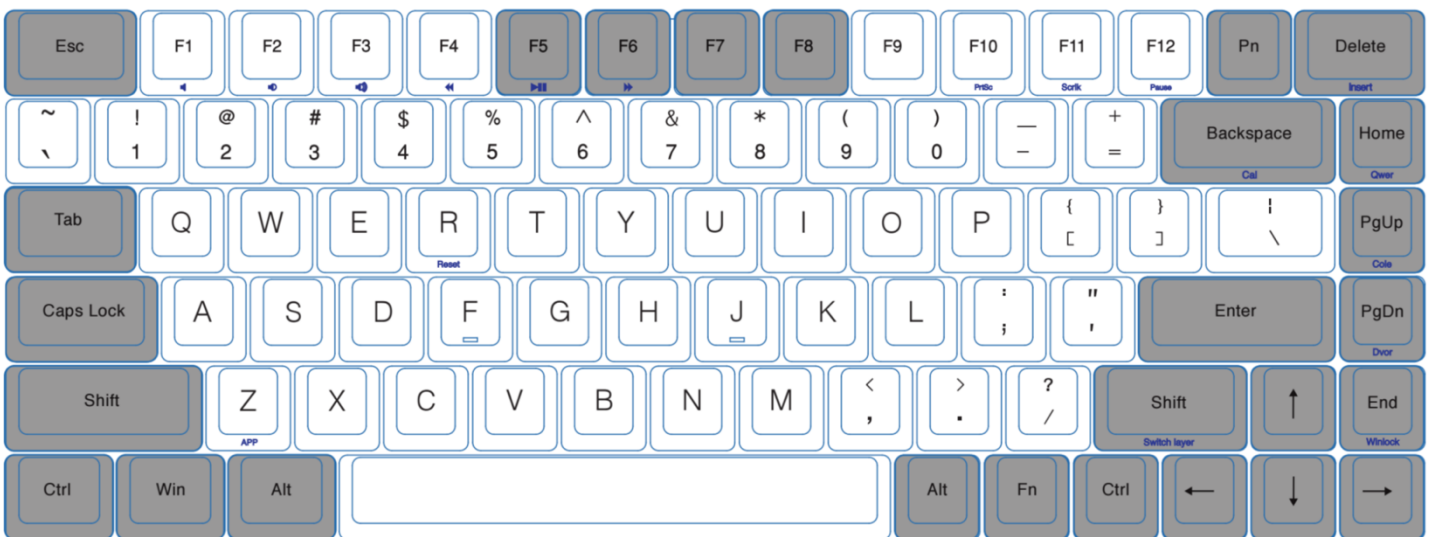

1. Switch O.S:

- a. Windows: Pn + W
- b. Mac: Pn + M
**Windows interchangeable with Alt
F1~F12 please refer to the mac keyboard layout
Some keys need to set their own**
- c. Linux: Pn + L
Caps lock interchangeable with L_Ctrl

2. Switch Keyboard Layout:

- a. QWERTY: Fn + Home
- b. COLEMAK: Fn + PgUp
- c. DVORAK: Fn + PgDn

3. Spacebar LEDs instructions:

- a. Left side LED – Switching Layers (Fn + R_shift)

Red - Layer 1
Green - Layer 2
Blue - Layer 3
None - Default
- b. Right side LED – Switching layout · Windows lock

Red - COLEMAK
Green - DVORAK
Blue – Windows lock
None – QWERTY (Default)

4. Other functions:

- a. Programming steps please refer to POK3R manual
- b. Reset the current layer key-codes: Fn + R
- c. Reset all layers' key-codes and restore to default: L_Alt + R_Alt
- d. Swap Fn position:
Hit Fn + L_Alt for 3 seconds then select new Fn position directly